






### LAMP CP22

COMPACT, HIGH EFFICIENCY ENCLOSURE LAMP

Fitted with Schuko socket and switch, it can be mounted with clips on DIN rail, on a bracket (ALFASTAFF) with screws or with magnetic fixing.  
It fits exactly one 19" height/unit (44 mm).

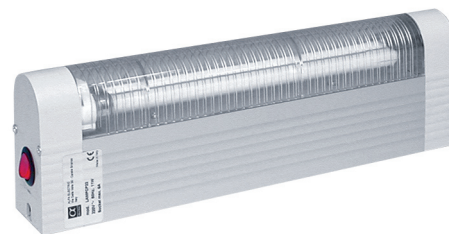

Features	Unit	LAMP CP22	LAMP SP22
Power supply	V/Hz	230/50	230/50
Schuko socket	-	Yes 6A	No
Luminosity	Lm	900	
Lamp type	-	high efficiency fluorescent lamp	
Power consumption	W	11	
Service life	hrs	5000	
Switch	-	On/Off for the lamp only	
Connection	-	3-pole terminal for 1.5 mm <sup>2</sup> wire	
Casing	-	Aluminium profile and ABS, UL94 V0, light grey	
Protection degree EN60529	-	IP20	
Protection class	-	Class 1, earthed	
Operating temperature	°C(°F)	-20/+50 (-4/+122)	
Storage temperature	°C(°F)	-45/+80 (-49/+176)	
Mounting	-	Clip on DIN rail, magnet or bracket, see ordering code below	
Installation position	-	variable	
Dimensions HxWxD	mm	95x43x268	
Weight	kg	0.76	
Package dimensions HxWxD	mm	105x58x310	
Conformity	-	CE	




#### Versions

Clip mounting on DIN rail	LAMP CP22+CLIP	LAMP SP22+CLIP
Magnet mounting	LAMP CP22+MAGN	LAMP SP22+MAGN
Bracket mounting	LAMP CP22+STAF	LAMP SP22+STAF

#### Accessories

Bracket for lamp	ALFASTAFF	ALFASTAFF
Magnet for lamp	ALFAMAGNETE	ALFAMAGNETE
Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

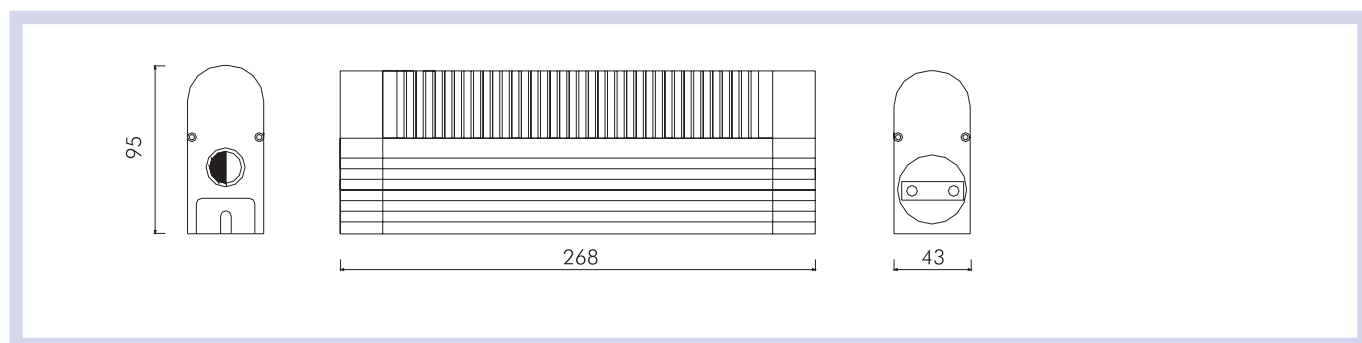

ael-cat-en-13.01



### LED LAMP CP22

COMPACT, HIGH EFFICIENCY ENCLOSURE LED LAMP WITH MOTION SENSOR

Fitted with Schuko socket and switch, it can be mounted with clips on DIN rail, on a bracket (ALFASTAFF) with screws or with magnetic fixing.

It fits exactly one 19" height/unit (44 mm).

Models LED LAMP CP22S and LED LAMP SP22S are fitted with motion sensor.



Features	Unit	LED LAMP CP22	LED LAMP SP22	LED LAMP CP22S	LED LAMP SP22S
Power supply*	V/Hz	100-230 VAC (±10%)/50-60			
Schuko socket	-	Yes 6A	No	Yes 6A	No
Luminosity	Lm	380			
Lamp type	-	LED			
Power consumption	W	5			
Service life	hrs	45000			
Switch	-	On/Off for the lamp only		Motion sensor	
Connection	-	3-pole terminal for 1.5 mm <sup>2</sup> wire			
Casing	-	Aluminium profile and ABS, UL94 V0, light grey			
Protection degree EN60529	-	IP20			
Protection class	-	Class I, earthed			
Operating temperature	°C(°F)	-20/+60 (-4/+140)			
Storage temperature	°C(°F)	-40/+80 (-40/+176)			
Mounting	-	Clip on DIN rail, magnet or bracket, see ordering code below			
Installation position	-	variable			
Dimensions HxWxD	mm	95x43x268			
Weight	kg	0.76			
Package dimensions HxWxD	mm	105x58x310			
Conformity	-	CE			



\* DC voltage on request

#### Versions

Clip mounting on DIN rail - Code ending	model code+CLIP	model code+CLIP
Magnet mounting	model code+MAGN	model code+MAGN
Bracket mounting	model code+STAF	model code+STAF

#### Accessories

Bracket for lamp	ALFASTAFF	ALFASTAFF
Magnet for lamp	ALFAMAGNETE	ALFAMAGNETE
Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

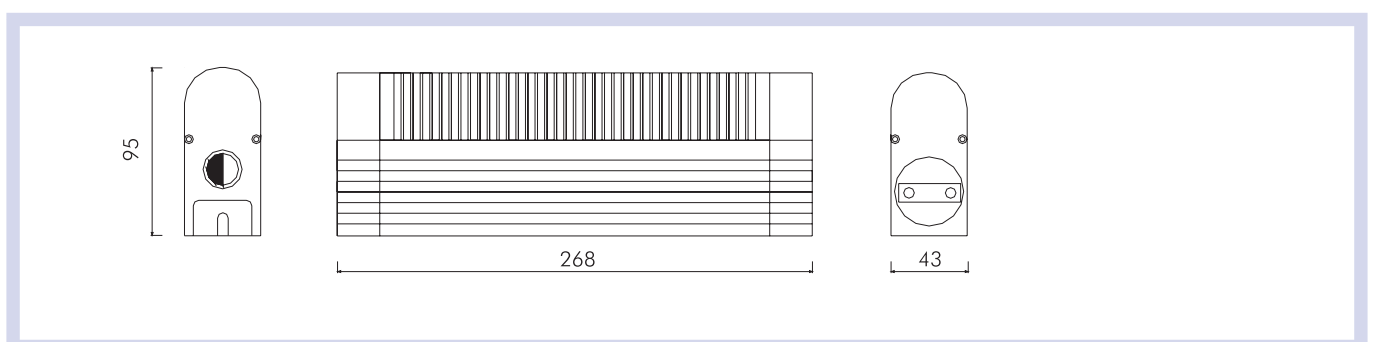

ael-cat-en-13.01



### LAMP 36

#### SLIM ENCLOSURE LAMP




Slim and versatile fluorescent lamp. More units can be connected together in a chain up to a total power of 100W, by using the addition interconnection cable including in the packaging.



Features	Unit	LAMP3604	LAMP3605	LAMP3605-115V	LAMP3606	LAMP3606-115V	LAMP3607	LAMP3608
Power supply	V/Hz	230/50	230/50	115/60	230/50	115/60	230/50	230/50
Lamp type	-	T5 fluorescent lamp with integrated electronic ballast						
Power consumption	W	6	8		13		21	28
Service life	hrs	5000						
Connection	-	Plug-in cable 1.8 m long inside the package						
Series of lamps	-	Possible with male/male extension cable, max 100W total series						
Casing	-	Plastic, white						
Protection degree/class	-	IP20/Class II						
Operating temperature	°C(°F)	-20/+50 (-4/+122)						
Storage temperature	°C(°F)	-45/+80 (-49/+176)						
Mounting	-	Screws, hidden behind the lamp						
Dimensions HxWxD	mm	270x44x22	345x44x22		570x44x22		910x44x22	1210x44x22
Weight	kg	0.33	0.36		0.50		0.53	0.60
Conformity	-	CE						

#### Accessories

Door limit switch without block	FINCOR
Door limit switch	FINRIP
Safety flashing device with lamp switch	FSL
Safety flashing device with lamp and auxiliary switches	FSLA
Plastic bracket	STAF36
Plastic clip	CLIP36

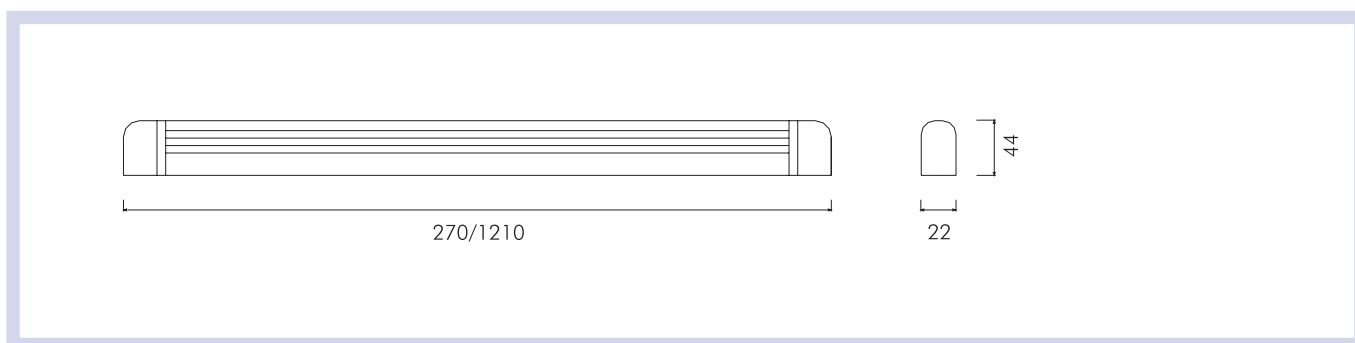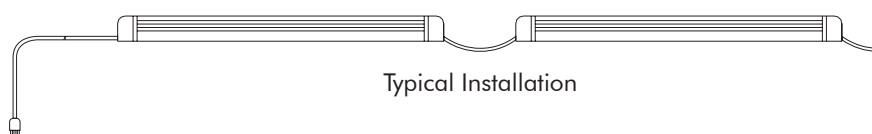



## LAMP 3012


ENCLOSURE LAMP



Features	Unit	LAMP3012-10W	LAMP3012-15W	LAMP3012-18W	LAMP3012-30W
Power supply	V/Hz	230/50			
Lamp type	-	T8 fluorescent lamp with integrated electronic ballast			
Power consumption	W	10	15	18	30
Service life	hrs	5000			
Connection	-	3-pole terminal for 2.5 mm <sup>2</sup> wire			
Casing	-	Plastic, white			
Protection degree/class	-	IP20/Class I, earthed			
Operating temperature	°C(°F)	-20/+50 (-4/+122)			
Storage temperature	°C(°F)	-45/+80 (-49/+176)			
Mounting	-	Screws, hidden behind the lamp			
Dimensions HxWxD	mm	390x62x35	490x62x35	645x62x35	950x62x35
Weight	kg	0.45	0.70	0.85	1.25
Conformity	-	CE			

### Accessories

Door limit switch without block	FINCOR	FINCOR	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA	FSLA	FSLA

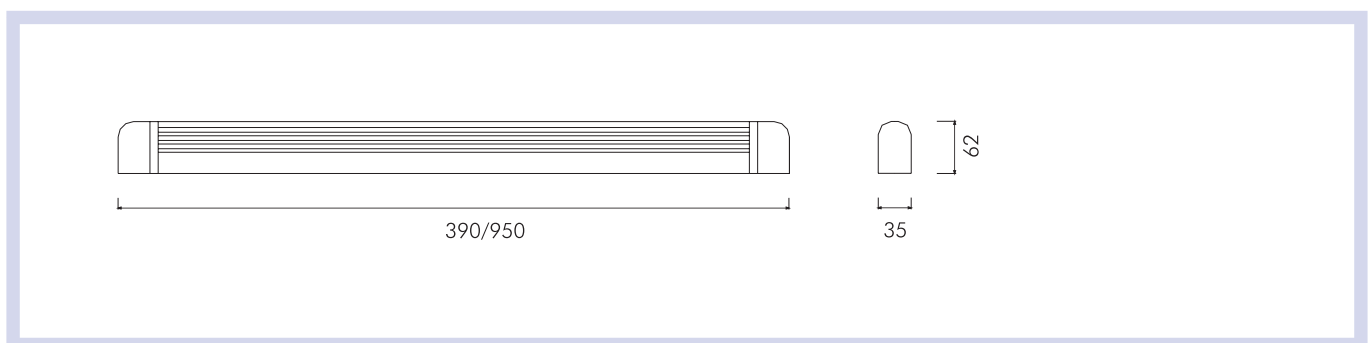

ael-cat-en-13.01



## LAMP 2005



Slim and versatile fluorescent lamp. More units can be connected together in a chain up to a total power of 100W, by using the addition interconnection cable including in the packaging.



Features	Unit	LAMP2005-8W	LAMP2005-13W
Power supply	V/Hz	230/50	
Lamp type	-	T5 fluorescent lamp with integrated electronic ballast	
Power consumption	W	8	13
Service life	hrs	5000	
Connection	-	Plug-in cable 1.8 m long inside the package	
Series of lamps	-	Possible with male/male extension cable, max 100W total series	
Casing	-	Plastic, white	
Protection degree/class	-	IP20/Class II	
Operating temperature	°C(°F)	-20/+50 (-4/+122)	
Storage temperature	°C(°F)	-45/+80 (-49/+176)	
Mounting	-	Screws, hidden behind the lamp	
Dimensions HxWxD	mm	340x70x20	560x70x20
Weight	kg	0.50	0.70
Conformity	-	CE	

### Accessories

Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

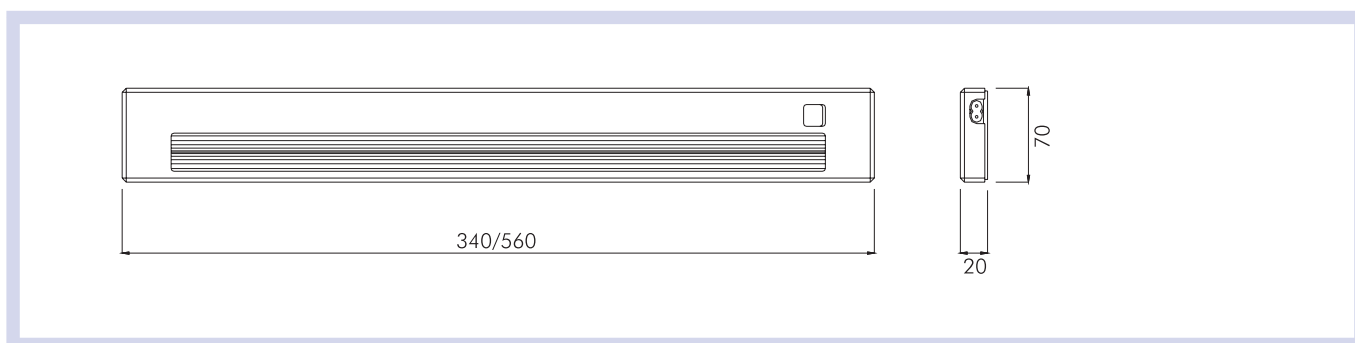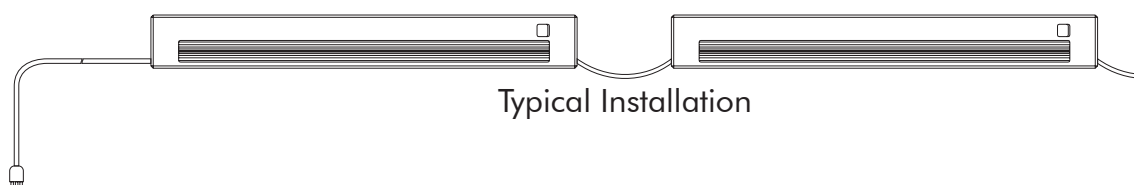

ael-cat-en-13.01